

# **SERVICE MANUAL**

# BE-3D CHASSIS

MODEL	COMMANDER	DEST.	CHASSIS NO.	MODEL	COMMANDER	DEST.	CHASSIS NO.
KV-29X1A	RM-839	Italian	SCC-K05H-A	KV-29X1K	RM-839	OIRT	SCC-K08Q-A
KV-29X1B	RM-839	French	SCC-K01H-A	KV-29X1L	RM-839	Irish	SCC-J21B-A
KV-29X1D	RM-839	AEP	SCC-K07H-A	KV-29X1R	RM-839	OIRT	SCC-K08R-A
KV-29X1E	RM-839	Spanish	SCC-K06H-A	KV-29X1U	RM-839	UK	SCC-K04F-A









ITEM MODEL	Television System	Channel Coverage	Colour System
Italian	B/G/H	VHF: E2-E12, S1-S20, A-H, H1,H2 UHF: E21-E69	PAL NTSC3.58/4.43 (video input only)
French	B/G/H, D/K, L, I	L SECAM VHF: F2-F10 UHF: F21-F69 TV CABLE TV (1) VHF: B-Q UHF: S21-S44 PAL B/G/H VHF: E2-E12 UHF: E21-E69 CABLE TV (1): S1-S41 CABLE TV (2): S01-S05, M1-M10, U1-U10 ITALIA VHF: A-H, H1, H2 PAL I UHF: B21-B69 D/K VHF: R01-R20 UHF: B21-B69 CABLE TV (1): S1-S41 CABLE TV (2): S01-S05, S42-S46	PAL, SECAM NTSC3.58/4.43 (video input only)
AEP	B/G/H, D/K	B/G/H VHF: E2-E12 UHF: S1-S20 CABLE TV (1): S1-S41 CABLE TV (2): S01-S05, M1-M10, U1-U10 ITALIA VHF: A-H, H1, H2 D/K VHF: R01-R20 UHF: B21-B69 CABLE TV (1): S1-S41 CABLE TV (2): S01-S05, S42-S46	PAL, SECAM NTSC3.58/4.43 (video input only)
Spanish	B/G/H, D/K	PAL B/G/H VHF: E2-E12 UHF: E21-E69 CABLE TV (1): S1-S41 CABLE TV (2): S01-S05, M1-M10, U1-U10 ITALIA VHF: A-H, H1, H2 D/K VHF: R01-R20 UHF: B21-B69 CABLE TV (1): S1-S41 CABLE TV (2): S01-S05, S42-S46	PAL, SECAM NTSC3.58/4.43 (video input only)
OIRT	B/G/H, D/K	B/G/H VHF: E2-E12 UHF: E21-E69 CABLE TV (1): S1-S41 CABLE TV (2): S01-S05, M1-M10, U1-U10 ITALIA VHF: A-H, H1, H2 D/K VHF: R01-R12 UHF: R21-R69 CABLE TV (1): S1-S41 CABLE TV (2): S01-S05, S42-S46	PAL, SECAM NTSC3.58/4.43 (video input only)
Irish UK	1	UHF: U21-U69	PAL NTSC3.58/4.43 (video input only)

MODEL	29X1A	29X1B	29X1D	29X1E	29X1K 29X1R	29X1L 29X1U
Power Consumption	87W	101W	101W	101W	101W	149W

# **SPECIFICATIONS**

Picture Tube

Super Trinitron

Approx. 72 cm (29 inches)

(Approx. 68 cm picture measured

diagonally)
110° -deflection

#### **Rear/Front Terminals**

# [REAR]

1 21-pin Euro connector (CENELEC standard)

- Inputs for audio / video signals

- Inputs for RGB

- Outputs for TV audio and video signals

→ 2/- 2 2, 21-pin Euro connector (CENELEC standard)

- Inputs for audio / video signals

- Inputs for S video

- Outputs for TV audio and video signals (selectable)

FRONTI

→ 3, Video input - phono jack

3, Audio inputs - phono jacks

3, S video input - 4 pin DIN

Stereo minijack - headphone jack

Sound output

**Dimensions** 

Left/Right 2x10W (RMS)

2x20W (music power) 676x557x528 mm approx.

Weight Approx. 43.0 kg

Supplied accessories RM-839 Remote Commander (1)

Batteries R6 (2)

Other features Fastext, TOPTEXT

#### [RM-839]

Remote control system

Infrared control

Power requirements Dimensions 3V dc (2 batteries) R6 (size AA) Approx. 210x45x24 mm (w/h/d)

Weight

Approx. 90g (Not including battery)


# Design and specifications are subject to change without notice.

Model name	KV-29X1A	KV-29X1B	KV-29X1D	KV-29X1E	KV-29X1K KV-29X1R	KV-29X1L KV-29X1U
PIP	OFF	OFF	OFF	OFF	OFF	OFF
MPIP	OFF	OFF	OFF	OFF	OFF	OFF
Rotation Coil	ON	ON	ON	ON	ON	ON
VM Set	ON	ON	ON	ON	ON	ON
Scart 1	ON	ON	ON	ON	ON	ON
Scart 2	ON	ON	ON	ON	ON	ON
Front in (3)	ON	ON	ON	ON	ON	ON
Scart 4	OFF	OFF	OFF	OFF	OFF	OFF
AKB in 16:9 mode	ON	ON	ON	ON	ON	ON
TXT	ON	ON	ON	ON	ON	ON
FLOF	ON	ON	ON	ON	ON	ON
TOP	ON	ON	ON	ON	ON	ON
Norm B/G/H	ON	ON	ON	ON	ON	OFF
Norm I	OFF	ON	OFF	OFF	OFF	ON
Norm D/K	OFF	ON	ON	ON	ON	OFF
Norm L	OFF	ON	OFF	OFF	OFF	OFF
Language Preset	Italian	French	German	Spanish	OIRT	English

# WARNING (KV-29X1L/29X1U only)

The flexible mains lead is supplied connected to a B.S. 1363 fused plug having a fuse of 5 AMP capacity. Should the fuse need to be replaced, use a 5 AMP FUSE approved by ASTA to BS 1362, ie one that carries the mark.


IF THE PLUG SUPPLIED WITH THIS APPLIANCE IS NOT SUITABLE FOR YOUR SOCKET OUTLETS IN YOUR HOME. IT SHOULD BE CUT OFF AND AN APPROPRIATE PLUG FITTED. THE PLUG SEVERED FROM THE MAINS LEAD MUST BE DESTROYED AS A PLUG WITH BARED WIRES IS DANGEROUS IF ENGAGED IN A LIVE SOCKET OUTLET. When an alternative type of plug is used it should be fitted with a 5 AMP FUSE, otherwise the circuit should be protected by a 5 AMP FUSE at the distribution board.




How to replace the fuse. Open the fuse compartment with the screwdriver blade and replace the fuse.

FUSE

# 



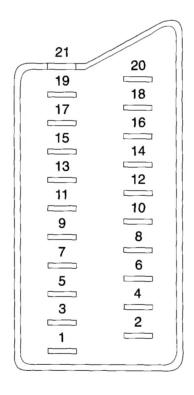

Pin No.	1	2	4	Signal	Signal Level
1	0	0	0	Audio output B (Right)	Standard level : 0.5V rms Output impedance : Less than 1k ohms*
2	0	0	0	Audio input B (Right)	Standard level : 0.5V rms Output impedance : More than 10k ohms*
3	0	0	0	Audio output A (Left)	Standard level : 0.5V rms Output impedance : Less than 1k ohm*
4	0	0	0	Ground (Audio)	
5	0	0	0	Ground (Blue)	
6	0	0	0	Audio input A (Left)	Standard level : 0.5V rms Output impedance : Less than 10k ohm*
7	0	•	•	Blue input	0.7 ± 3dB, 75 ohms, positive
8	0	0	0	Function select (AV control)	High state (9.5 - 12V): Part mode Low state (0 - 2V): TV mode Input impedance: More10k ohms Input capacitance: Less than 2nF
9	0	0	0	Ground (Green)	
10	0	0	0	Open	
11	0	•	•	Green	
12	0	0	0	Open	
13	0	0	0	Ground (Red)	
14	0	0.	0	Ground (Blanking)	
	0	-	-	Red input	0.7 ± 3dB, 75 ohms, positive
15	_	0	0	(S signal) croma input	0.7 ± 3dB, 75 ohms, positive
16	0	•	•	Blanking input (Ys signal)	High state (1 - 3V) Low state (0 - 0.4V) Input impedance : 75 ohms
17	0	0	0	Ground (Video output)	
18	0	0	0	Ground (Video input)	
19	0	0	0	Video output	1V ± 3dB, 75ohms, positive sync : 0.3V (-3 + 10dB)
20	0	_	-	Video input	1V ± 3dB, 75ohms, positive sync : 0.3V (-3 + 10dB)
20	-	0	0	Video input Y (S signal)	1V ± 3dB, 75ohms, positive sync : 0.3V (-3 + 10dB)
21	0	0	0	Common ground (plug, sheild)	

<ul> <li>Connected</li> </ul>	•	Not Connected (Ope	en) * at 20Hz - 20kHz

Pin No.	Signal	Signal Level
1	Ground	
2	Ground	
3	Y (S signal) input	$1V \pm 3$ dB 75 ohm, positive Sync. 0.3V -3 + 10dB
4	C (S signal) input	0.3V ± 3dB 75ohm, positive Sync.

	Ó	0
--	---	---

#### **TABLE OF CONTENTS**

Sec	<u>ction</u>	<u>Title</u>	<u>Page</u>	<u>Sec</u>	tion	<u>Title</u>	<u>Page</u>
1.	GEN	ERAL		5.	DIA	AGRAMS	
	Ove	erview	7		5-1.	Block Diagrams	33
	Get	ting Started	8		5-2.	Circuit Boards Location	
		Operation			5-3.	Schematic Diagrams and Printed Wiring Boards	
	Adv	vanced Operations	10			*D Board	
	Tel	etext	16			*A Board	
	Opt	tional Equipment	17			*C Board	
	For	Your Information	19			*VM Board	
						*D2 Board	
2.	DISA	ASSEMBLY				*IF Board [VIF (AEP), VIF (UK)]	
	2-1.	Rear Cover Removal				*IF Board [VIF (FR)]	
	2-2.	Chassis Assy Removal				IC Blocks	
	2-3-1.	. Service Position (1)	20		5-4.	Semiconductors	67
		. Service Position (2)					
	2-4.	Wire Dressing	21	6.	EXP	PLODED VIEWS	
	2-5.	A Board Removal			6-1.	Chassis	69
	2-6.	Extension Board			6-2.	Picture Tube	70
	2-7.	Picture Tube Removal	22				
		Removal and Replacement of The Main-Bracket		7.	ELE	CTRICAL PARTS LIST	71
		Bottom Plates	23				
3.	SET-	-UP ADJUSTMENTS					
	3-1.	Beam Landing	24				
	3-2.	Convergence					
	3-3.	White Balance					
4.	CIRC	CUIT ADJUSTMENTS					
	4-1.	Electrical Adjustments	28				
	4-2.	Test Mode 2:	31				
	4-3.	BE-3D Self Diagnostic Software					

#### CAUTION

SHORT CIRCUIT THE ANODE OF THE PICTURE TUBE AND THE ANODE CAP TO THE METAL CHASSIS, CRT SHIELD, OR CARBON PAINTED ON THE CRT, AFTER REMOVING THE ANODE.

#### WARNING!!

AN ISOLATION TRANSFORMER SHOULD BE USED DURING ANY SERVICE TO AVOID POSSIBLE SHOCK HAZARD, BECAUSE OF LIVE CHASSIS.

THE CHASSIS OF THIS RECEIVER IS DIRECTLY CONNECTED TO THE AC POWER LINE.

#### SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND MARK \( \underline{\Lambda} \) ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND, IN THE PARTS LIST ARE CRITICAL FOR SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY.

#### **ATTENTION**

APRES AVOIR DECONNECTE LE CAP DE L'ANODE, COURT-CIRCUITER L'ANODE DU TUBE CATHODIQUE ET CELUI DE L'ANODE DU CAP AU CHASSIS METALLIQUE DE L'APPAREIL, OU AU COUCHE DE CARBONE PEINTE SUR LE TUBE CATHODIQUE OU AU BLINDAGE DU TUBE CATHODIQUE.

#### ATTENTION !!


AFIN D'EVITER TOUT RISQUE D'ELECTROCUTION PROVENANT D'UN CHÁSSIS SOUS TENSION, UN TRANSFORMATEUR D'ISOLEMENT DOIT ETRE UTILISÉ LORS DE TOUT DÉPANNAGE. LE CHÁSSIS DE CE RÉCEPTEUR EST DIRECTEMENT RACCORDÉ À L'ALIMENTATION SECTEUR.


# ATTENTION AUX COMPOSANTS RELATIFS À LA SÉCURITÉ!!

LES COMPOSANTS IDENTIFIÈS PAR UNE TRAME ET PAR UNE MARQUE A SUR LES VUES EXPLOSÉES ET LES LISTES DE PIECES SONT D'UNE IMPORTANCE CRITIQUE PUR LA SÉCURITÉ DU FONCTIONNEMENT. NE LES REMPLACER QUE PAR DES COMPOSANTS SONY DONT LE NUMÉRO DE PIÉCE EST INDIQUÉ DANS LE PRÉSENT MANUEL OU DANS DES SUPPLÉMENTS PUBLIÉS PAR SONY.

# **SECTION 1 GENERAL**

The operating instructions mentioned here are partial abstracts from the Operating Instruction Manual. The page numbers of the Operating Instruction Manual remain as in the manual.

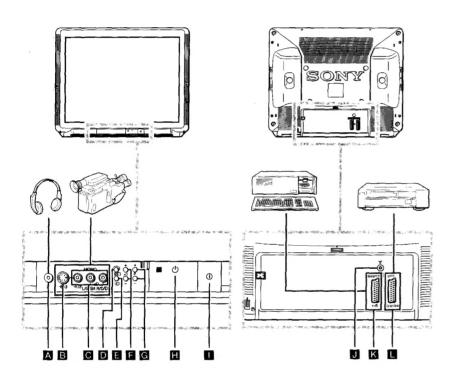

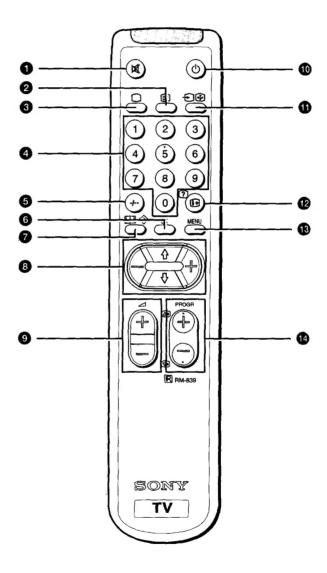

#### Overview

# **Overview**

This section briefly describes the controls and the buttons on the TV set and on the Remote Commander. Please open the flap at the front of the instruction manual for illustrations of the TV set and the Remote Commander. Letters in boxes refer to the buttons on the TV set, numbers in circles to the buttons on the Remote Commander. For more information, refer to the page numbers given next to each description.

#### TV buttons and Terminals

Reference and Symbol	Name	Refer to Page
Front of the set		
AΩ	Headphones jack	4
B <del>-</del> §3	S video input jack	29
<b>6</b>	Audio/video input jacks	29
<b>B ▶</b>	Automatic Preset button	11
E 🕣	Input mode button	13
F ⊿+/-	Volume control	12
G P+/-	Programme button	12
н Ф	Standby mode indicator	12
• •	Main power switch	12
Rear of the set		
ן ע	Aerial socket	10
K →Ö1	21 pin Euro connector	29
<b>G</b> →2/ <del>-</del> <b>3</b> 92	21 pin Euro connector	29

# **Overview**

# **Remote Commander Operation**

Re	ference and Symbol	Name	Refer to Page
0	u*	Muting on/off button	12
0		Teletext button	13
0	0	TV power on/TV mode button	12, 13
0	1, 2, 9, 0	Number buttons	12
6	-/	Double digit entering button	12
6	ОК	OK (Confirmation) button	14
0	##/♦	Screen format button Teletext: Favourite pages button	12, 28
8		Menu control	14
9	⊿+/-	Volume control button	12
0	Ф	Standby button	12
•	<del>-</del> ②/④	Input mode button Teletext: Freezing the subpage	13, 27
ø	<b>1</b> /?	On-screen display button Teletext: reveal button	12, 27
®	MENU	Menu on/off button	14
•	PROGR +/-	Programme buttons Teletext: Page up/page down buttons	12, 13

# Step 1

# **Connecting the Aerial**

(If you connect a VCR, skip to step 2)


Insert the aerial plug tightly into the aerial socket \( \sqrt{ \bar{\text{J}}} \). Use a good-quality aerial cable (not supplied), corresponding to the relevant regulations.

# Step 2

# **Connecting a VCR**


We recommend that you tune in the VCR signal to programme number "0". For details, see "Presetting Channels Manually" on page 16.

See "Connecting Optional Equipment" on page 29 for more information.



# Step 3

# **Inserting the Batteries Into the Remote Commander**



Respect your environment! Dispose of used batteries in an environmentally friendly way.

# Step 4

# **Presetting Channels Automatically**

With this function, the TV can automatically search and store up to 100 different channel numbers.

If you prefer manual presetting, refer to "Presetting Channels Manually" on page

Plug into mains. Press the power switch ① **II** on the TV set.

Press and hold the button D on the TV set until the automatic menu is displayed and the search starts.

After all available channels are stored, the normal TV picture is shown.

Note: Channels are automatically stored as follows;

KV-25X1U/29X1U	KV-25X1L/29X1L
Programme 1 BBC1	Programme 1 RTE1
Programme 2 BBC2	Programme 2 RTE2
Programme 3 ITV	Programme 3 BBC1
Programme 4 CH4 or S4C	Programme 4 BBC2
	Programme 5 ITV
	Programme 6 CH4 or S4C

# **TV Operation**

This section explains functions used whilst watching TV. Most operations are carried out using the remote commander (numbers in circles). All basic functions are also available on the TV set (letters in boxes). Open the flap at the front of the Instruction Manual to see the illustrations of the Remote Commander and the TV set.


# **TV** Operation

То	Press
Switch on	① <b>I</b> on TV
Switch off temporarily	(b) (a) TV is now in standby mode and (b) [H] indicator on TV lights up.
Switch on from standby mode	☐ ③, PROGR +/- ❹ ⓒ or any number button ④.
Switch off completely	① <b>II</b> on TV To save energy, switch off your TV completely when TV is not in use.
Select programmes	PROGR +/- 1
Display on screen indications	Press again to make the indications disappear.
Adjust the volume	
Mute the sound	□ Press again to restore the sound.
View programmes in 16:9 mode	☐ Press again to return to 4:3 mode.

TV Operation (continued)	
То	Press
View video input picture (see page 30 for detailed information)	⊕
View teletext (see page 27 for detailed information)	
Switch on	⊜ 2
Select a page	three number buttons <b>4</b> or <b>A</b> (for next page) or <b>A</b> (for previous page).
Use fastext	Blue, Green, Red or Yellow 3.
Switch off	0 3

# Adjusting and Setting the TV Using the Menu

You can adjust and set various functions on the TV using the following remote commander buttons:

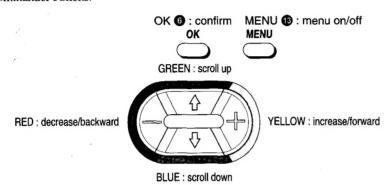

# **Choosing the Menu Language**

This function enables you to change the language of the menu screens.

- 1 Press power switch ① on the TV. If the standby indicator ① on the TV is lit, press or a number button on the Remote Commander.
- 2 Press the MENU button 3 on the remote commander.


LANGUAGE

- E ENGLISH
  DEUTSCH
  FRANÇAIS
  ITALIANO
  NEDERLANDS
  POLSKI
  ČESKY
  MAGYAR
- **3** Press blue or green **3** to select the language you want then press yellow **3**.
- 4 Press the MENU button 13 to restore the normal TV picture.

# **Presetting Channels Automatically**

You may have already preset the channels automatically by using the method shown on page 11. You can also preset channels automatically by using the remote commander as follows:

- 1 Press the MENU button 13.
- Press blue or green 3 to select the symbol on the menu screen then press yellow 3.



- **3** Press blue or green **3** to select 'AUTO PROGRAMME'.
- 4 Press and hold yellow 8 until the automatic menu is displayed and the search starts.

After all available channels have been preset, the normal TV picture is shown.

**AUTO PROGRAMME** 


PROG SYS CH LABEL 01 B/G C25 ----

# 1111


# **Presetting Channels Manually**

This function enables you to preset channels one by one to different programme numbers. This is also convenient for allocating programme numbers to various video input sources.

- 1 Press the MENU button 13.
- Press blue or green ③ to select the symbol ☐ on the menu screen then press yellow ③.



Press blue or green 3 to select 'MANUAL PROGRAMME' then press yellow 3.



- 4 Press blue or green 3 to select on which programme number you want to preset a channel then press yellow 3.
- Press blue or green 3 to select the TV broadcast system T or a video input source (AV1,AV2 ...) then press yellow 3.
- (This step 6 is only for KV-25X1L/29X1L)

  Press blue or green (3) to select 'C' (for terrestrial channels) or 'S' (for cable channels) then press yellow (3).
- 7 Select the first number digit of 'CHAN' then the second number digit of 'CHAN' with the number buttons 4 on the remote commander or

  Press blue or green 5 to search for the next available channel number.


- If you want to store the channel number, go to step 9. If not, select a new channel number using the number buttons 4 on the remote commander or press blue or green 5 to resume the search.
- 9 Press OK 6.
- **10** Repeat steps 4 to 9 to preset other channels.
- Press the MENU button ® to restore the normal TV picture.

# **Adjusting the Picture and Sound**

Although the picture and sound are adjusted at the factory, you can adjust them to suit your own taste.

1 Press the MENU button ®.

Press blue or green 3 to select III for picture control or ♪ for sound control then press yellow 3.



3 Press blue or green 10 to select the desired item then press yellow 18.

4 Press red or yellow 3 to alter the item then press OK 6. For the effect of each control, see the following tables.

**5** Repeat steps 3 and 4 to adjust the other items.

6 Press the MENU button 13 to restore the normal TV picture.

# Contrast Lower — I — Higher Brightness Darker — I — Brighter Colour Less — I — More Sharpness Softer — I — Sharper Hue Greenish — I — Reddish (NTSC signals only) Reset Resets picture to the factory preset levels.


# **Adjusting the Picture and Sound (continued)**

SOUND CONTROL	Effect
Treble	Less —— I —— More
Bass	Less — More
Balance	Left   Right
Reset	Resets sound to the factory preset levels.
Spatial	Acoustic sound effect.
Dual Sound	A: Left channel —> B: Right channel —> stereo —> mono
Volume Offset	Presets the volume level for individual programmes.
	-12 0 +12
∩ Volume	Adjusts the headphone volume.
∩ Dual Sound	Presets the headphone channels.
	A: Left channel —> B: Right channel —> stereo —> mono

# **Manual Fine-Tuning**

Normally, the automatic fine-tuning (AFT) function is operating. If the picture is distorted however, you can manually fine-tune the TV to obtain a better picture reception.

- Press the MENU button 13.
- Press blue or green 3 to select the symbol 🗗 on the menu screen then press yellow 8.
- Press blue or green 8 to select 'MANUAL PROGRAMME' then press yellow 8.




- Press blue or green 8 to select the programme number which corresponds to the channel you want to manually fine-tune.
- Press yellow 8 repeatedly until the AFT position changes colour...
- Press blue or green 8 to change the frequency of the channel from -15 to +15.
- Press OK 6.
- Repeat steps 4 to 7 to fine-tune other channels.
- Press the MENU button 13 to restore the normal TV picture.

# **Sorting Programme Positions**

This function enables you to move channels to different programme numbers.

- Press the MENU button 13.
- Press blue or green 3 to select the symbol 🖹 on the menu screen then press
- Press blue or green 8 to select 'PROGRAMME SORTING' then press yellow 8.



Press blue or green 8 to select the channel you want to move to another programme number then press yellow 8.



- Press blue or green 8 to select the programme number to which you want to move the channel selected in step 4 then press yellow 8.
- Repeat steps 4 to 5 if you wish to move other channels to different programme
- Press the MENU button 13 to restore the normal TV picture.


# **Using Parental Lock**

This function enables you to prevent undesirable broadcasts from appearing on the screen. We suggest you use this function to prevent children from watching programmes which you consider unsuitable.

1 Press the MENU button 13.


Press blue or green **3** to select the symbol **≘** on the menu screen then press yellow **3**.

Press blue or green to select 'PARENTAL LOCK' then press yellow 8.



4 Press blue or green 3 to select the channel you want to block then press yellow 3.

The symbol appears before the programme number to indicate that this channel is now blocked.



**5** Repeat step 4 if you wish to block other channels.

6 Press the MENU button 18 to restore the normal TV picture.


Note: To unblock, press yellow **3** after selecting the channel to unblock in the 'PARENTAL LOCK' menu.

# **Using the Sleep Timer**

This function enables you to select a time period after which the TV automatically switches into standby mode.

1 Press the MENU button (3).

2 Press blue or green 3 to select the symbol ② on the menu screen then press yellow 3.



**3** Press yellow **3**.

4 Press red or yellow 8 to set time delay and press OK 6.

OFF 0:30 1:00 1:30 ...... 3:30 4:00


One minute before the TV switches into standby mode, a message is displayed on the screen.

**5** Press the MENU button **3** to restore the normal TV picture.

# **Adjusting the Picture Rotation**

If, due to the earth magnetism, the picture slants, you can use the function 'Picture Rotation' to readjust the picture.

- Press the MENU button 13.
- Press blue or green ® to select the symbol 🖹 on the menu screen then press yellow 8.




- Press blue or green 8 to select 'PICTURE ROTATION' then press yellow 8.
- Press red or yellow 3 to adjust the picture rotation then press OK 6. The adjusting range is -5 to +5.
- Press the MENU button ® to restore the normal TV picture.

# **Skipping Programme Positions**

This function enables you to skip unused channels when selecting programme numbers with the PROGR+/- buttons. However, you can still watch the skipped channel(s) by using the number buttons.

- Press the MENU button 13.
- Press blue or green 3 to select the symbol 🖻 on the menu screen then press yellow 8.
- Press blue or green 8 to select 'MANUAL PROGRAMME' then press yellow 8.



- 4 Press blue or green 3 to select the channel you want to skip then press yellow 3.
- Press blue or green 8 until '---' appears in the 'SYS' position.

MANU	AL PR	OGRAM	ME PRES	ET
PROG	SYS	CHAN	LABEL	AFT
1	B/G	C 1		ON
2	B/G	C 4		ON
3	B/G	C12		ON
4	310	C22		ON
5	B/G	C33		ON
6	B/G	C41		ON
7	B/G	C17		ON
8	B/G	C32		ON


- 6 Press OK 6.
- Repeat steps 4 to 6 to skip other channels.
- 8 Press the MENU button 13 to restore the normal TV picture.

25

# **Captioning a Station Name**

Names for channels are usually automatically taken from teletext if available. You can however name a channel or an input video source using up to five characters (letters or numbers).

- 1 Press the MENU button 13.
- Press blue or green 3 to select the symbol on the menu screen then press yellow 3.
- Press blue or green to select 'MANUAL PROGRAMME' then press yellow 1.



- Press blue or green to select the channel you wish to caption then press yellow repeatedly until the first element of the 'LABEL' position is highlighted.
- Press blue or green to select a letter or number and press yellow (select '-' for a blank). Select other characters in the same way.

MANU	AL PR	OGRAN	IME PRES	SET
PROG	SYS	CHAN	LABEL	AFT
1	B/G	C 1		ON
2	B/G	C 4		ON
3	B/G	C12		ON
4	B/G	C22	-`A	ON
5	B/G	C33	(3)	ON
6	B/G	C41		ON
7	B/G	C17		ON
8	B/G	C32		ON

- **6** After selecting all the characters, press OK **6**.
- **7** Repeat steps 4 to 6 to caption names for other channels.
- 8 Press the MENU button 18 to restore the normal TV screen.

#### **Teletext**

Most TV channels broadcast information via teletext. The index page of the broadcaster (usually page 100) gives you information on how to use the service.

Make sure you use a TV channel with a strong signal, otherwise teletext errors may occur.

# **Switching Teletext On and Off**

- 1 Select the channel which carries the teletext service you wish to view.
- Press 

   to display teletext.

  If no teletext signal is broadcast, the indication P100 is displayed on a black screen.
- 3 Input three digits for the page number using the number buttons 4. The page counter searches for the page and after some seconds the page is displayed.
- 4 Press 🔾 3 to return to the normal TV picture.

# **Using Other Teletext Functions**

То	Press	
Access the next or preceding teletext page	for the next page or for the preceding page	
Mix the mode	when in teletext mode.  Now the teletext page is superimposed on the TV programme. Press again to return to the normal teletext display.	
Freeze a teletext subpage	① Press once again to cancel.	
Reveal hidden information (eg: answers to a quiz)	? • Press once again to cancel.	

# **Favourite page system**

You can store up to four of your favourite teletext pages per Teletext service. In this way you have quick access to the pages you frequently use.

#### Storing pages

- 1 Use the number buttons 4 to select the page you would like to store.
- 2 Press ♦ 7 twice. The colour prompts at the bottom of the screen flash.
- 3 Press red, green, blue or yellow to store the selected page. The page is now stored on this colour.

Repeat steps 1 to 3 for the other 3 pages.

#### **Displaying the Favourite Pages**

- 1 Press ♦ 7.
- 2 Press blue, green, red or yellow to select the desired page.

Make sure you press 💠 🕡, otherwise the normal Fastext facility operates.

# **Using Fastext**

(only available, if the TV station broadcasts Fastext signals)

With Fastext you can access pages with one key stroke. When Fastext is broadcast, a colour-coded menu appears at the bottom of the screen. The colours of this menu correspond to the red, green, yellow and blue colours on the Remote Commander.

Press the Remote Commander colour button that corresponds to the colour-coded menu. The selected page is displayed after some seconds.

#### **Optional Equipment**

# **Connecting Optional Equipment**

There is a wide range of optional equipment you can connect to your TV. Refer to the illustrations on the front flap page of this manual.

Symbol	Acceptable input signals	Available output signals
-Ð 3, -Ð 3 B -⊛ 3 C	Normal audio/video and S video	No output
-ö1 K	Normal audio/video and RGB	Audio/video from TV tuner
G→ 2/G→ 2 L	Normal audio/video and S video	Audio/video from selected source

#### **About S video input**

Video signals may be separated into Y (luminance) and C (chrominance) signals. Separating the two signals prevents interference and thus improves the picture quality.

#### Notes on connections:

If the picture or sound is distorted, move the VCR away from the TV.

When connecting a monaural VCR, connect only the white jack to both the TV and VCR.

28

# **Selecting Input and Output Signals**

This section explains how to select the output signal from 32/2 and how to select and view the input. You can use direct access buttons ? In E to select the input or the menu system to select input and output.

# **Selecting With Direct Access Buttons**

Press • • • • repeatedly.


Press 

3 to restore the normal TV picture.

Symbol on the screen	Input Signal	
⊕1 → つ つ つ つ つ つ つ つ つ の の の の の の の の の の	Audio/video through Euro AV connector K RGB through Euro AV connector K Audio/video through Euro AV connector S video through Euro AV connector Audio/video through the phono jacks S video through the phono jacks S	

# Selecting With the Video Connection Menu

- Press the MENU button 13
- Press blue or green 8 to select → for "VIDEO CONNECTION" then press vellow 8.




- Press blue or green to select input or output then press yellow 8.
- Press blue or green repeatedly to select the desired input or output source then press OK 6.
- Press the MENU button **13** to restore the normal TV picture.

Note: If you select 'AUTO' for output, the output source automatically becomes the same as the desired input source.

# **Using AV Label Preset**

This function enables you to label the input sources using up to five characters (letters or numbers).

- Press the MENU button
- Press blue or green 3 to select the symbol on the screen then press vellow 8.
- Press blue or green 8 to select 'AV LABEL PRESET' then press vellow .



- 4 Press blue or green 3 to select the desired input source then press vellow 8.
- Press blue or green 8 to select a letter or number then press yellow 8 (select '-' for a blank). Select other characters in the same way.
- After selecting all the characters, press OK 6.
- Repeat steps 4 to 6 to label other input sources.
- Press the MENU button (3) to restore the normal TV screen.

# **Troubleshooting**


Here are some simple solutions to the problems which affect the picture and sound.

Problem	Solution
No picture (screen is dark), no sound	<ul> <li>• Plug the TV in.</li> <li>• Press ① ■ on the TV. (If <sup>(¹)</sup> indicator ℍ is on, press ② ③ or a programme number ④ on the Remote Commander.)</li> <li>• Check the aerial connection.</li> <li>• Check if the selected video source is on.</li> <li>• Turn the TV off for 3 or 4 seconds then turn it on again using ① ■.</li> </ul>
Poor or no picture (screen is dark), but good sound	• Press MENU 19 to enter the 'PICTURE CONTROL' menu and adjust 'Contrast', 'Brightness' and 'Colour'.
Poor picture quality when watching an RGB video source.	• Press → <b>① E</b> repeatedly to select → <b>心</b> .
Good picture but no sound	<ul> <li>Press ∠ + ⑤ ■.</li> <li>If □¾ is displayed on the screen, press □¾ ⑥</li> </ul>
No colour for colour programmes	Press MENU  to enter the 'PICTURE CONTROL' menu, select 'Reset' then press OK
Remote Commander does not function.	•Replace the batteries.

If you continue to have problems, have your TV serviced by qualified personnel. Never open the casing yourself.


# **SECTION 2 DISASSEMBLY**

# 2-1. REAR COVER REMOVAL

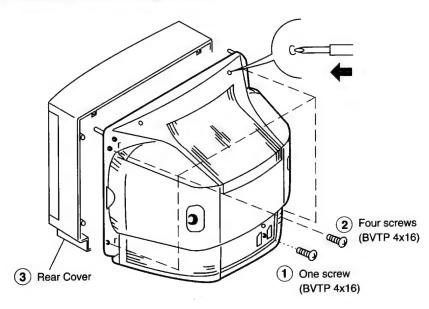


# 2-3-1. SERVICE POSITION (1)


20

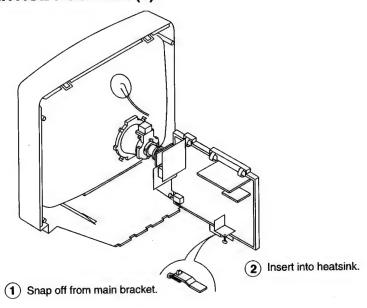

# 2-2. CHASSIS ASSY REMOVAL




# 2-3-2. SERIVCE POSITION (2)




Clip bracket into Beznet.

# 2-4. WIRE DRESSING


# 2-6. EXTENSION BOARD

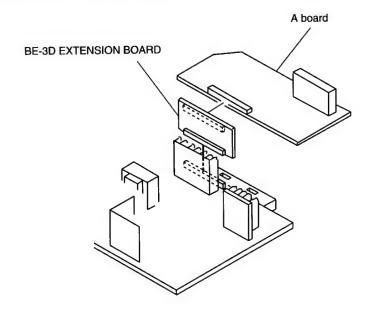

# 2-5. A BOARD REMOVAL

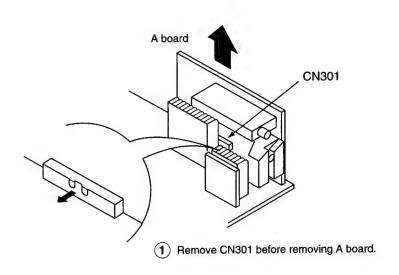

# 2-7. PICTURE TUBE REMOVAL

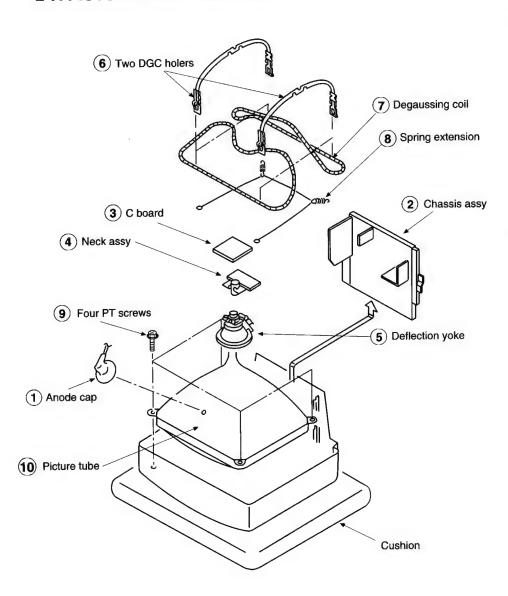


# REMOVAL OF ANODE-CAP

Note: Short circuit the anode of the picture tube and the anode cap to the metal chassis, CRT shield or carbon paint on the CRT, after removing the anode.

#### \* REMOVING PROCEDURES.



1 Turn up one side of the rubber cap in 2 Using a thumb pull up the rubber cap 3 When one side of the rubber cap is the direction indicated by the arrow (a)



firmly in the direction indicated by the



separated from the anode button, the anode-cap can be removed by turning up the rubber cap and pulling it up in the direction of the arrow ©

# **HOW TO HANDLE AN ANODE-CAP**

- Don't damage the surface of anode-cap with sharp shaped material!
- Don't press the rubber hardly not to hurt inside of anode-caps ! A metal fitting called as shatter-hook terminal is built into the rubber.
- Don't turn the foot of rubber over hardly! The shatter-hook terminal will stick out or damage the rubber.






# REMOVAL AND REPLACEMENT OF THE MAIN-BRACKET BOTTOM PLATES.

# (1) REMOVING THE PLATES

In the event of servicing being required to the solder side of the D Board printed circuit, the bottom plates fitted to the main chassis bracket require to be removed. This is performed by cutting the gates with a sharp wire cutter at the locations shown and indicated by arrows.

**Note:** There are 5 plates fitted to the main bracket and secured by 4 or 6 gates. Only remove the necessary plate to gain access to the circuit board.

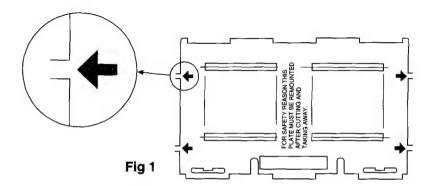




# (2) REFITTING THE PLATES


Because the plates differ in size it is important that the correct plates are refitted in their original location.


The plates are identified by markings A-B-C-D-E on their top side.

- 1. Identify the plate by locating its marking.
- 2. Turn the plate over noting where the marking is located.
- 3. Locate the corresponding marking indicated on the main chassis bracket. See Fig 2.
- 4. Refit the plate as indicated in Fig 3 with the markings located next to each other.

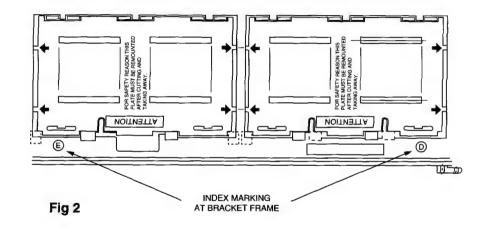

In the event of the plates requiring to be removed at a later stage, this can be achieved by inserting a screwdriver in the snap-recess indicated as in Fig 4 and lifting out.





# SECTION 3 SET - UP ADJUSTMENTS

- When complete readjustment is necessary or a new picture tube is installed, carry out the following adjustments.
- Unless there are specific instructions to the contrary, carry out these adjustments with the rated power supply.
- Unless there are specific instructions to the contrary, set the controls and switches to these settings:

Contrast	 . 80%	(or remote control
	norma	al)
☆ Brightness	 50%	

- Carry out the following adjustments in this order:
- 1. Beam landing
- 2. Convergence
- 3. Focus
- 4. White balance

Note: Testing equipment required.

- 1. Color bar/pattern generator
- 2. Degausser
- 3. DC power supply
- 4. Digital multimeter
- 5. Oscilloscope

#### Preparation:

- In order to reduce the influence of geomagnetism on the set's picture tube, face it east or west.
- Switch on the set's power and degauss with the degausser.

# 3-1. BEAM LANDING

- Input the white signal with the pattern generator.
   CONTRAST BRIGHTNESS normal
- 2. Position neck assy as shown in Fig.3-2.
- 3. Set the pattern generator raster signal to red.
- 4. Move the deflection yoke forward and adjust with the purity control so that the red is at the centre and the blue and the green take up equally sized areas on each side. (See Fig. 3-1 3-3)
- 5. Move the deflection yoke forward and adjust so that the entire screen becomes red. (See Fig. 3-1)
- 6. Switch the raster signal to blue, then to green and verify the condition.
- When the position of the deflection yoke has been decided, fasten the deflection yoke with the screws.
- 8. If the beam does not land correctly in all the corners, use a magnet to adjust it. (See Fig. 3-4)





Fig. 3-1

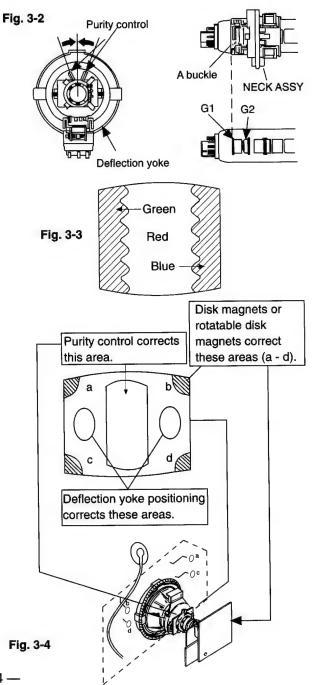


# 3-2. CONVERGENCE

# **Preparation:**

- Before starting this adjustment, adjust the focus, horizontal size, and vertical size.
- Minimize the brightness setting.
- Provide a dot pattern.


# (1) Horizontal and vertical static convergence

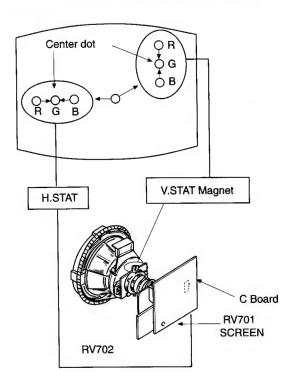


- 1. (Moving horizontally), adjust the H.STAT control so that the red, green, and blue points are on top of each other at the centre of the screen.
- 2. (Moving vertically), adjust the V.STAT magnet so that the red, green, and blue points are on top of each other at the centre of the screen.
- If the H.STAT variable resistor cannot bring the red, green, and blue points together at the centre of the screen, adjust the horizontal convergence with the H.STAT variable resistor and the V.STAT magnet in the manner given below.
   (In this case, the H.STAT variable resistor and the


V.STAT magnet influence each other)


 Tilt the V.STAT magnet and adjust the static convergence by opening or closing the V.STAT magnet.




4. If the V.STAT magnet is moved in the direction of the (a) and (b) arrows, the red, green, and blue points move as shown below.











• Operation of BMC (Hexapole) Magnet




The respective dot position resulting from moving each magnet interact, so be sure to perform adjustment while tracking.
 Use the H.STAT VR to adjust the red, green, and blue dots so they coincide at the centre of the screen (by moving the dots in the horizontal direction).

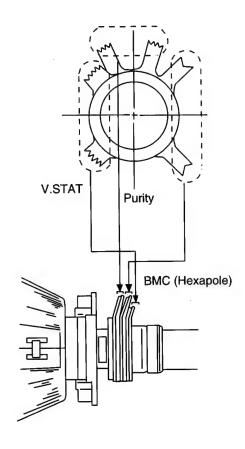

# (2) Dynamic convergence adjustment.


#### Preparation:

- Before starting this adjustment, adjust the horizontal static convergence and the vertical static convergence.
- 1. Slightly loosen the deflection yoke screws.
- 2. Remove the deflection yoke spacer.
- 3. Move the deflection yoke as shown in the figure below and optimize the convergence.
- 4. Tighten the deflection yoke screws.
- 5. Re-install the deflection yoke spacer.

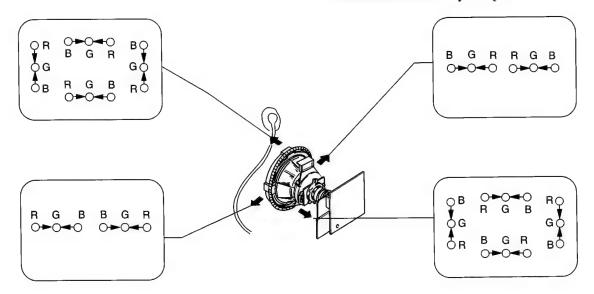


# (3) Screen corner convergence.

If you are unable to adjust the corner convergence properly, correct them with the use of permalloy assemblies.







# 3-3. WHITE BALANCE

# **G2** Setting

- 1. Switch the set into AV mode (apply no signal to the AV connectors).
- 2. Connect a Volt Meter to Test Point 1 on the A board.
- 3. Adjust RV01 to obtain a voltage of  $3.0V \pm 0.3V$ .

# White balance adjustment

- 1. Input an all white signal from the pattern generator.
- 2. Enter into the service mode.
- 3. Enter into Picture Adjustment service menu.
- 4. Select sub-contrast and adjust to 7.
- 5. Select the Green Drive and adjust so that the white balance becomes optimum.
- 6. Select the Blue Drive and adjust so that the white balance becomes optimum.
- 7. Press the TV button to return to TV operation.

PICTURE ADJUSTMENT	
AFC mode	1
REF position	2
SCP BGR	1
SCP BGF	1
Trap Fo	0
Sub contrast	Adj
Sub colour	Adj
Sub brightness	Adj
Sub hue	Adj
Green drive	Adj
Blue drive	Adj
Green cutoff	Adj
Blue cutoff	Adj
Gamma	0
Pre / overshoot	0
Y delay	3


# SECTION 4 CIRCUIT ADJUSTMENTS

# 4-1. ELECTRICAL ADJUSTMENTS

Service adjustment to this model can be performed with the supplied remote commander RM-839.

# **HOW TO ENTER INTO SERVICE MODE**

- 1. Turn on the main power switch of the set and enter into standby mode.
- 2. Press the following sequence of buttons on the Remote Commander.



"TT--" will appear in the top right corner of the screen. Other status information will also be displayed.

3. Press MENU on the commander to obtain the following menu on the screen.

# TEST MENU > Picture adjustment Geometry Wide MSP IC status Current TV status

- 4. Move to the corresponding adjustment using the button on the commander.
- 5. Press the + button to enter the selected adjustment.
- 6. Turn off the power to quit the service mode when adjustments are completed.

PICTURE ADJUSTMENT		
AFC mode	1	
REF position	3	
SCP BGR	1	
SCP BGF	1	
Trap Fo	7	
Sub contrast	Adj	
Sub colour	Adj	
Sub brightness	Adj	
Sub hue	Adj	
Green drive	Adj	
Blue drive	Adj	
Green cutoff	Adj	
Blue cutoff	Adj	
Gamma	0	
Pre / overshoot	0	
Y delay	5	

GEOMETRY ADJUSTMEN	ıτ
V Size	Adj
V Position	Adj
S Correction	Adj
V Linearity	Adj
H Size	Adj
H Position	Adj
Pin Amp	Adj
Pin Phase	Adj
AFC Bow	Adj
AFC Angle	Adj
EHT V	Adj
EHT H	Adj
Corner Pin	Adj

WIDE		
V Aspect	43	
V Scroll	31	
Upper V Lin	0	
Lower V Lin	0	
Left Blanking	1	
Right Blanking	11	

MSF	•		
	AGC ON/OFF	ON	
	Constant gain CDB	0	
	FM prescale FMP	36	
	Zwei mono-st WHI	36	
	Zwei st-mono WLO	18	
	Zwei mono-bi WMH	36	
	Zwei bi-mono WLO	18	
	Time zwei WML	41	
	Fawct limit	10	
	Fawct soll init FAW	12	
	Fawer tol	2	
	Nicam Err Max CCT	10	
	Nicam Err Min	0	
	Nicam Prescale NIP	97	
	Time Nicam	31	
	Carrier mute CRM	OFF	
	Audio clock ACO	HIZ	
	Scart prescale	25	
	Scart volume	64	

IC STATUS (CXA2000 / CXA2040)		
CXA2000		
H lock	1	
IKR	1	
VNG	0	
X-RAY	0	
Colour system	3	
CV1 Sync	1	
CXA2040		
Sync sep	1	
S1 mode pin	01	
S2 mode pin	01	
TUNER		
Tuner status	01101011	

TV STATUS	
Text system	C TEXT/TV TEXT
Dolby	NO/YES
Text language set	WEST/EAST/RUSSIAN
Menu language set	WEST/EAST/RUSSIAN
Destination	B/D/U/K/L/E/A/R
Scart 16:9	OFF/ON
RGB priority	OFF/ON
Ageing	OFF/ON
Size	29/25
Colour trap sw	SECAM/ALL
Velocity mod	ON/OFF
AFT STATUS	WINDOW/HIGH/LOW

#### **SUB BRIGHTNESS ADJUSTMENT**


- 1. Input a Phillips pattern.
- 2. Set the picture control to minimum.
- 3. Enter into the Picture Adjustment Service Menu.
- 4. Adjust the Sub-Brightness data so that there is barely a difference between the 0 IRE and 10 IRE signal.

#### **SUB CONTRAST ADJUSTMENT**

- 1. Input a video that contains a small 100% area on a black background.
- 2. Set the picture control to maximum.
- 3. Connect an oscilloscope to pin 3 of CN301 (A board).
- 4. Enter into the Picture Adjustment Service Menu.
- 5. Adjust the Sub-contrast data to obtain a black to white amplitude of 2.50 volts.

#### SUB COLOUR ADJUSTMENT

- 1. Receive a PAL Colour Bar video signal.
- 2. Connect an oscilloscope to pin 3 of CN301 (A board).
- 3. Enter into the Picture Adjustment Service Menu.
- 4. Adjust the sub colour data so that cyan, magenta and blue colour bars are of equal height.



NOTE: The data shown in the TV STATUS table is dependant on destination, screen size and country.

#### SYSTEM B/G, D/K, I & L I.F ADJUSTMENT


- 1. Input an off air signal of between 60-100dBuV / 75 ohm terminated, via the tuner socket.
- 2. Enter into the I.F adjustment service mode (i.e. " TT 59 ") to fix the I.F frequency to 38.9 MHz.
- 3. Enter into the service mode and select "Current TVStatus".
- 4. Adjust the I.F coil (LV01) until the "AFT Status" indicates a "Window" condition.

#### SYSTEM L BAND 1 I.F ADJUSTMENT

- 1. Input an off air signal of between 60-100dBuV / 75 ohm terminated, via the tuner socket.
- 2. Enter into the I.F adjustment service mode (i.e. " TT 59 ") to fix the I.F frequency to 34.2 MHz.
- 3. Enter into the service mode and select "Current TVStatus".
- 4. Adjust the RV02 until the "AFT Status" indicates a "Window" condition.

#### **TUNER AGC ADJUSTMENT**

- 1. Receive a signal of 63dBuV / 75 ohm terminated via the tuner socket.
- 2. Measure the voltage at test point 1 (A board).
- 3. Adjust RV01 to obtain a voltage of  $3.0V \pm 0.3V$ .




- A Board component side -

#### **DEFLECTION SYSTEM ADJUSTMENT**

- 1. Enter into the Geometry Adjustment Service Menu.
- 2. Select and adjust each item in order to obtain the optimum image.

GEOMETRY ADJUSTME	NT
V Size	Adj
V Position	Adj
S Correction	Adj
V Linearity	Adj
H Size	Adj
H Position	Adj
Pin Amp	Adj
Pin Phase	Adj
AFC Bow	Adj
AFC Angle	Adj
EHT V	Adj
EHT H	Adj
Corner Pin	Adj

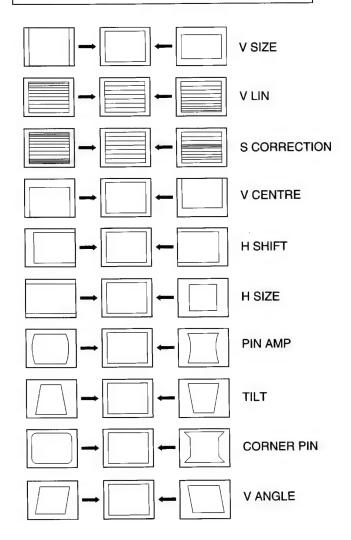

# 4-2. TEST MODE 2:

Is available by pressing Test button twice, OSD " TT " appears. The functions described below are available by pressing the two numbers. To release the Test mode 2, press 0 twice, or switch the TV into stand-by mode.

00	Switch test mode 2 off	
01	Picture maximum	
02	Picture minimum	
03 Volume 30%		
04 Set service menu mode		
05 Set production menu mode		
06		
07	Set ageing condition	
08	Set shipping condition	
09	Language reset	
10	No function	
11	Adjustment without OSD	
12	Dummy	
13	Display TV configuration	
14	Forced AV 6:9 mode	
15	Reset LPM from ROM data	
16	copy LPM to reset memory	
17 Preset label for AV sources		
18 RGB priority on/off		
19		
20		
21	Sub contrast	
22	Sub colour	
23	Sub brightness	
24	Set destination = U	
25	Set destination = D	
26	Set destination = B	
27	Set destination = K	
28	Set destination = L	
29	Set destination = E	
30 No function		
31	Set destination =A	
32	32 Dummy	
33	Auto AGC	
34	Dummy	
35	Manual AGC adjust	

36-40	Dummy		
41	Re-initialise NVM		
42	Production use only		
43	Initialise geometry settings		
44	Initialise all favourite pages = 100		
45	Channel locks = off		
46	Dealer commander mode		
47	Default MSP settings		
48	Restore NVM test byte		
49	Delete NVM test byte		
50-60	No function		
61	Turn on Dolby Pro Logic mode		
62	White noise to left speaker		
63	White noise to right speaker		
64	White noise to centre speaker		
65	White noise to rear speaker		
66	Set standard stereo mode		
67	Set Pro Logic normal mode		
68	Set Pro Logic wide mode		
69	Set Pro Logic phantom mode		
70	No function		
71	Picture rotation on/off		
72	Dolby register settings		
74	No function		
75	Reset picture colour balance		
76	Reset picture geometry		
77	Reset sound settings		
78	Reset error codes in the NVM		
79-99	No function		


# 4-3. BE-3D SELF DIAGNOSTIC SOFTWARE

The identification of errors within the BE-3D chassis is triggered in 1 of 2 ways: -1: Bus busy or 2: Device failure to respond to IIC. In the event of one of these situations arising the software will first try to release the bus if busy (Failure to do so will report with continuous flashing LED) and then communicate with each device in turn to establish if a device is faulty. If a device is found to be faulty the relevant device number will be displayed through the led (Series of flashes which must be counted) See Table 1, non fatal errors are reported with this method.


Table 1

ERROR	LED ERROR COUNT
Protection circuit trip < ANY TIME >	02
IIC SCL LOW < POWER UP ONLY >	03
IIC SDA LOW < POWER UP ONLY >	04
IIC SDA & SCL LOW < POWER UP ONLY >	05
Jungle/Choroma controller no acknowledge < POWER UP ONLY >	06
Video Switch no acknowledge < POWER UP ONLY >	07
Tuner no acknowledge	08
MSP no acknowledge	09
NVM no acknowledge	10
M3L TXD LOW < POWER UP ONLY >	11
M3L RXD LOW < POWER UP ONLY >	12
M3L ENABLE LOW < POWER UP ONLY >	13
M3L TXD & RXD LOW < POWER UP ONLY >	14
Compact Text test fail < POWER UP ONLY >	15
AV switch cannot power on reset	16
Cannot initialise jungle	17
NVM acknowledge fail after initialisation	18
Multiple devices with no acknowledge < POWER UP ONLY >	19
Compacttext run-time failure	20
AVSWITCH response failure after power up	21
JUNGLE/CHROMA controller response failure after power up	22
CompactText does not respond	23

Flash Timing Example: e.g. error number 3.



# 5-2. CIRCUIT BOARDS LOCATION

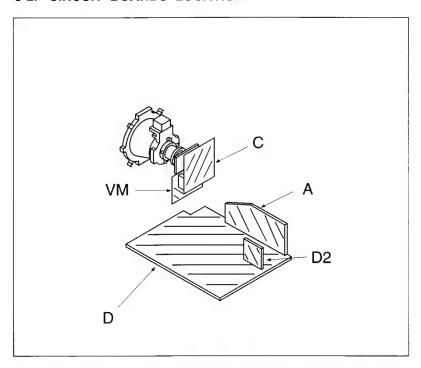

# 5-3. SCHEMATIC DIAGRAMS AND PRINTED WIRING BOARDS

# Note:

- All capacitors are in μF unless otherwise noted. pF: μμF 50WV or less are not indicated except for electrolytic and tantalums.
- All resistors are in ohms.

k = 1000, M = 1000K

 Indication of resistance, which does not have one for rating electrical power, is as follows.

Pitch: 5 mm Rating electrical power <sup>1</sup>/<sub>4</sub> W

: nonflammable resistor.

• : internal component.

• : panel designation, or adjustment for repair.

All variable and adjustable resistors have characteristic curve

B, unless otherwise noted.

• \( \perp \) : earth - ground.

• # : earth - chassis. • # : no mounted.

Note: The components identified by shading and marked are critical for safety. Replace only with the part number specified.

Note: Les composants identifies par une trame et une marque : sont critiques pour la securite.


Ne les remplacer que par une piece portant le numero specifie.

#### Reference information


Reference infor	manon	
RESISTOR	: RN	METAL FILM
	: RC	SOLID
	: FPRD	NONFLAMMABLE CARBON
	: FUSE	NONFLAMMABLE FUSIBLE
	: RS	NONFLAMMABLE METAL OXIDE
	: RB	NONFLAMMABLE CEMENT
	: RW	NONFLAMMABLE WIREWOUND
	: ×	ADJUSTABLE RESISTOR
COIL	: LF-8L	MICRO INDUCTOR
CAPACITOR	: TA	TANTALUM
	: PS	STYROL
	: PP	POLYPROPYLENE
	: PT	MYLAR
	: MPS	METALIZED POLYESTER
	: MPP	METALIZED POLYPROPYLENE
	: ALB	BIPOLAR
	: ALT	HIGH TEMPERATURE
	: ALR	HIGH RIPPLE

- Readings are taken with a colour-bar signal input.
- Readings are taken with  $10M\Omega$  digital multimeter.
  - Voltages are dc with respect to ground unless otherwise noted.
- Voltage variations may be noted due to normal production tolerances.
- All voltages are in V.
- Circled numbers are waveform references.
- ---- : B+ bus.
- : signal path. (RF)


# A BOARD IC301 CXA2000Q-TL

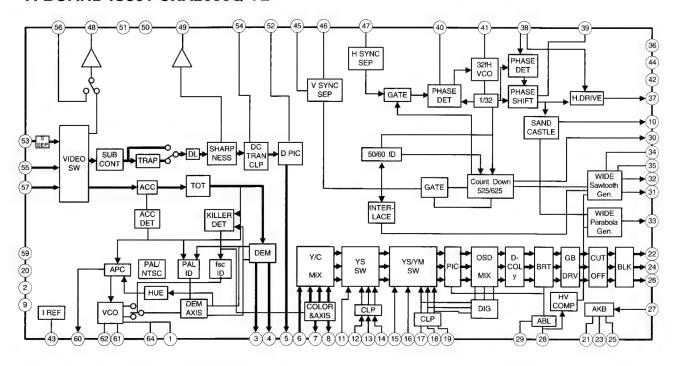


# A BOARD IC202 MSP3410/MSP3400

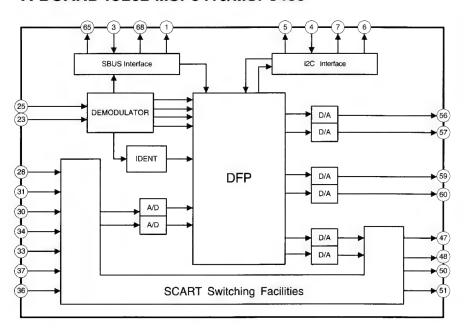


# A BOARD IC201 CXA2040Q

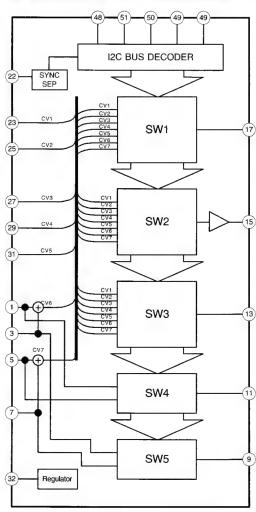


# A BOARD IC4 PST593C

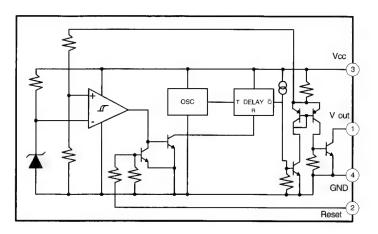


# D BOARD IC500 STV9379

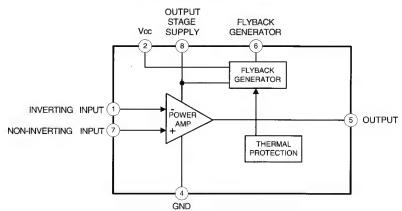

# **D BOARD IC600 STR-S6708**

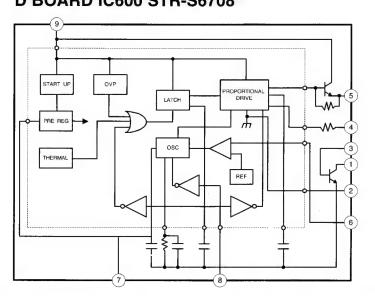


# **D BOARD IC1200 TDA7264**



#### 5-4. SEMICONDUCTORS

#### CXA2000Q-TL




#### MC14052BDR2




#### ST24E32M6TR




#### TMS27PC010A-15FML




#### CXA2040Q-T4




MSP3400C-PS MSP3410-15




STR-S6708




BF871-127




L4941BV



PST593C-MMP-4P



STV9379



BF421L-AMMO JA101TP-Q 2SA733-K 2SA933AS 2SA933S 2SA1091-O 2SC3502-F 2SC2808STP-R




LM393P M5216P TDA2822M µPC393C



SBX1790-51



TDA4665T-T




DTA144ES DTC114ES DTC143TS DTC144ES






SDA5250M-GEG




TDA7264




2SC1740S-RT




LM2940CT-5.0 LM2940CT LM2940T-9.0 MCT7809CT μPC2405HF



SE135N




TDA8395T




DTC144EK 2SA1037K 2SA1162-G 2SC2412K




# TLP721(D4-)




# 2SC2785-HFE




AU-01Z-V1 GP08D EG-1Z-V1 RGP02 EGP20G RGP10GPKG23 EL1Z RGP15GPKG23 EM1-V1 RU3YX EU-1-V1 RU4AM-T3 EU2-V1 RU4DS FML-G12S




RD3.9ESB2 MTZJ-3.6A RD5.1ESB2 MTZJ-3.9B RD5.6ESB2 MTZJ-5.1B MTZJ-5.6B RD6.2ESB2 RD6.8ESB2 MTZJ-6.2B MTZJ-6.8B RD7.5ESB2 RD10ESB2 MTZJ-7.5C RD39ES-B2 MTZJ-9.1 MTZJ-T-77-9.1A MTZJ-10 1SS133T-77 MTZJ-39



2SA1667 2SA1837 2SC3852A



BAS216 MA8330 DTZ6.8C 1SS355 DTZ9.1 UDZ-TE-17-5.6B DTZ33B UDZ-TE-17-9.1B




SLA-570KT3F




2SC2688-LK



D4SB60L




2SC4793



FMS-3FU




2SC4927-01



6-1. CHASSIS **(2**)

# 6-2. PICTURE TUBE

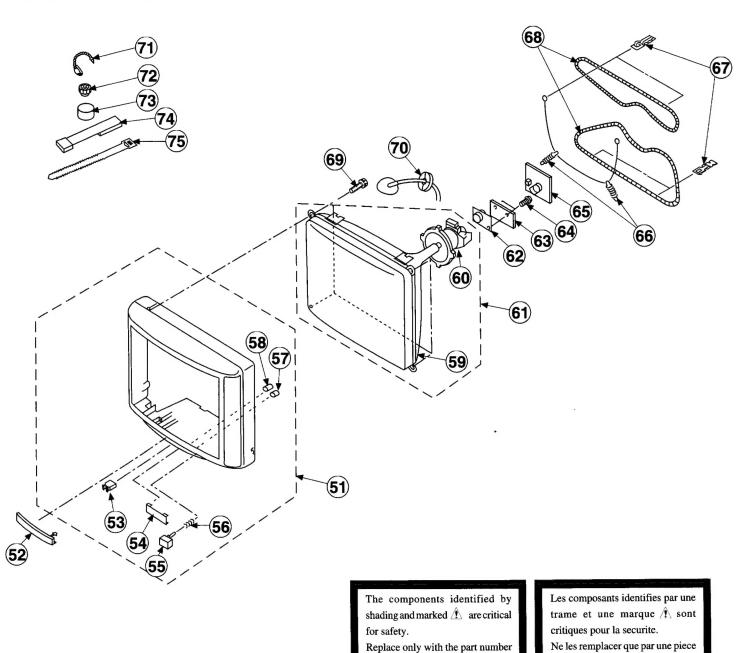

specified.

portant le numero specifie.